

APPLICATIONS

The series HSEJLP Forklift Jib is an extendable low profile Forklift attachment which offers a standard jib length of 1350mm closed and 2000mm extended. This slip-on Forklift attachment is supplied standard with a safety mounting chain to secure the jib to the forklift truck along with a safety swivel hook and shackle. The standard finish on this attachment is in safety yellow paint.

SPECIFICATIONS

 SWL
 2000kg


 H C of G
 536mm

 V C of G
 146mm

 Weight
 55kg

Fork Pockets 120x45mm
Pocket Centres 215mm
Design HSRD 027

Note: All lift truck attachments affect the safe working load of a lift truck. End users should consult their lift truck supplier to ensure the lift truck is rated for use with these attachments. In the case of a slung load when lifting a jib attachment, the net lifting capacity should be 0.8 times the rating of the lift truck to allow for the swinging load. Please consult your local lift truck dealer

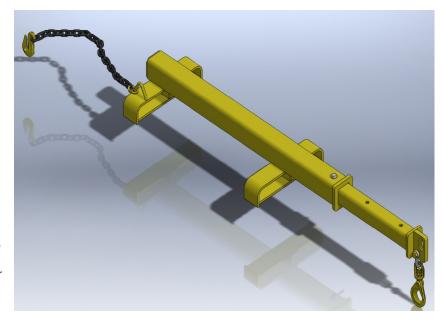

| SAFE WORKING LOAD (SWL) PER POSITION | | | | |
|--------------------------------------|--------|--------|--------|--------|
| POSITION | 1 | 2 | 3 | 4 |
| SWL (kg) | 2000kg | 1650kg | 940kg | 630kg |
| EXTENSION (mm) | 1325mm | 1550mm | 1775mm | 2000mm |

