


EYE / PIN FORKARM

CONTACT NAME		EMAIL	
ORGANISATION		MOBILE	
ADDRESS		TEL.	()
CITY/TOWN		STATE	POST CODE

INFORMATION & SPECIFICATIONS REQUIRED FOR QUOTATION

Truck or Attachment	Make	Width		Quantity	pairs
Truck or Attachment	Model	Thickness T		Taper	Standard
Capacity	kg	Blade		Forkarm Positioning	No <input type="checkbox"/> Yes <input type="checkbox"/>
Load Centre		Shank M		Lower Retaining hook	No <input type="checkbox"/> Yes <input type="checkbox"/>

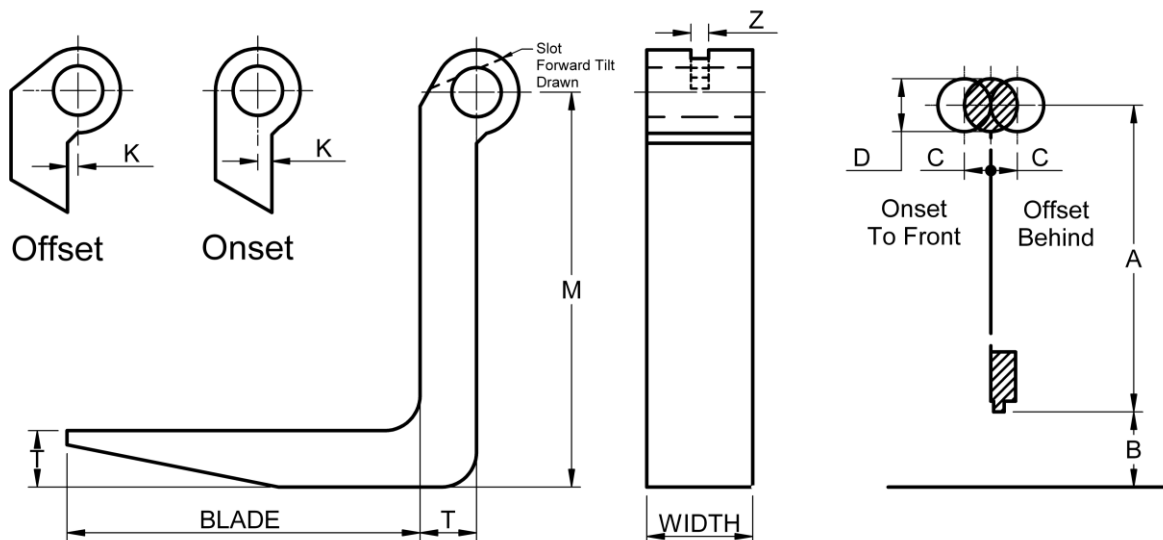

ADDITIONAL SPECIFICATIONS REQUIRED FOR MANUFACTURE WITHOUT FORK POSITIONING & HOOK

M		Sleeve centre to ground	A		Pin centre to bottom of carriage lower plate.
OD		Sleeve OD	B		Bottom of carriage lower plate to ground
ID		Sleeve ID, carriage pin clearance 0.50-1.5mm	D		Carriage Pin, sleeve clearance 0.50-1.50mm
K	Position	<input type="checkbox"/> Sleeve Position OFFSET	Z	Slot	<input type="checkbox"/> No Sleeve Slot (Z=0)
		<input type="checkbox"/> Sleeve Position ONSET			<input type="checkbox"/> Forward Tilt Sleeve Slot
		<input type="checkbox"/> Sleeve Position INLINE (K=0)			<input type="checkbox"/> Horizontal Tilt Sleeve Slot

Tapers, toes & tips are supplied unless otherwise specified. Irregular specifications may cost more.