

APPLICATIONS

Cascade offers a number of fork mounted jib cranes that quickly convert a lift truck into a mobile crane to easily move non-palletised product. A variety of Jib Crane models for practically any application to increase lift truck versatility.

Models include Multi-Angled, Flat, Slip-On, or Carriage- Mounted, allowing for effective slinging of loads beneath a hook.


The standard finish on this attachment is zinc.

SPECIFICATIONS

SWL	2000kg	
Towing Capacity	500kg	
H C of G	656mm	
V C of G	-24mm	
Weight	51.5kg	
Fork Pockets	120x40mm	
Drawing Ref	SK-27947	

DIMENSIONS

LENGTH 1365mm HEIGHT 154mm WIDTH 420mm

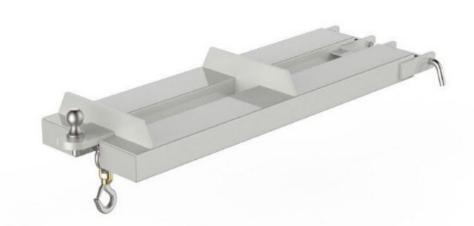

Note: All lift truck attachments affect the safe working load of a lift truck. End users should consult their lift truck supplier to ensure the lift truck is rated for use with these attachments. In the case of a slung load when lifting a jib attachment, the net lifting capacity should be 0.8 times the rating of the lift truck to allow for the swinging load. Please consult your local lift truck dealer.

FEATURES & BENEFITS

- Pocket size to suit most fork section sizes.
- Fork Arm Retaining Toggles
- Safety Swivel Hook supplied standard
- Two Lifting Points

SAFE WORKING LOAD (SWL) PER POSITION			
POSITION	1	2	TOWING CAPACITY
SWL (kg)	2000	2000	500
EXTENSION (mm)	575	1160	1265

