

APPLICATIONS

The Work baskets are used for conveying personnel with tools and work material to a work location by crane. The unit consists of a workbasket supported from crane lifting lugs. The basket can be entered from the side via a gate. These units can be built to carry two men and their equipment in accordance with Australian Standards AS1418. Harness attachment points are located on the top of the guard framing.

SPECIFICATIONS




SWL	250kg
Weight	380kg
Design Ref	HSRD 1705
2 PERSON	100kg per person



FEATURES & BENEFITS

- Inside Hand Rails.
- Harness Points at top of frame
- Fully Welded Heavy Duty Frame
- Finished in safety yellow
- Dedicated Lifting Chains

Note: Personnel in the basket require certified safety harness and lanyard at all times. The personnel in and around the work basket require an induction on how to safely operate and use work basket— especially on how to safely and effectively communicate with the crane operator.

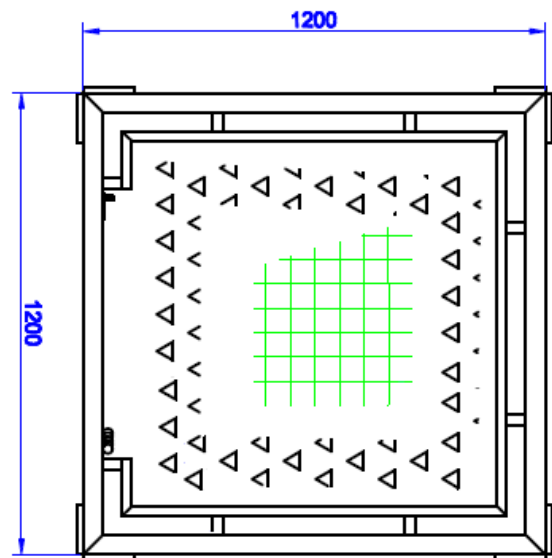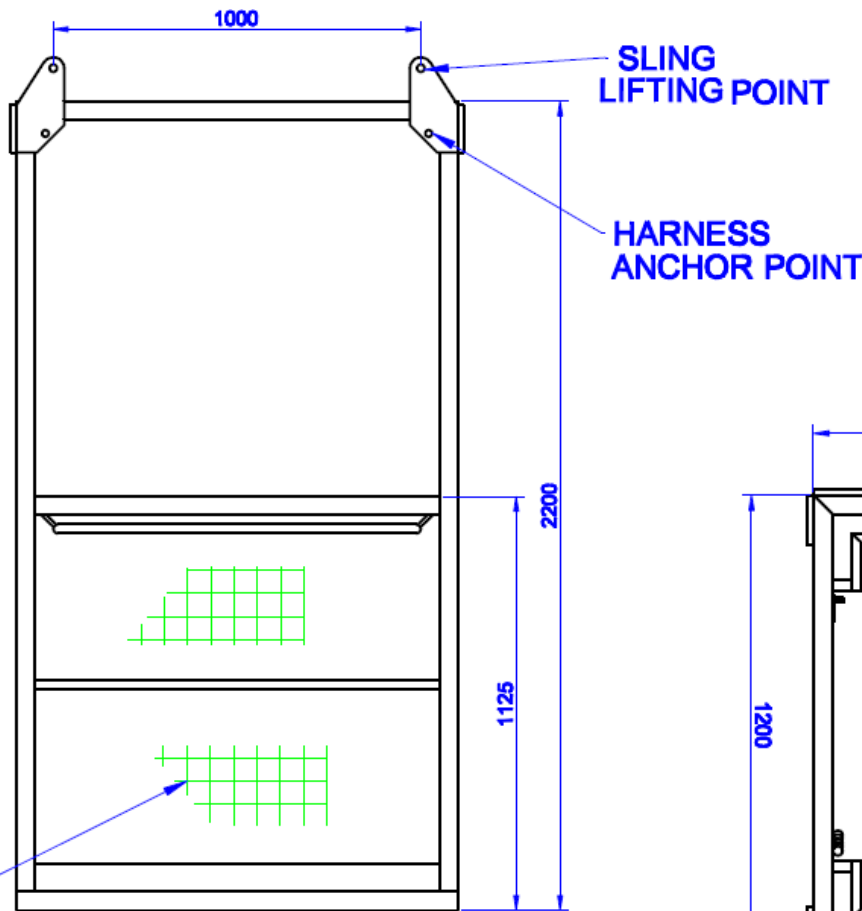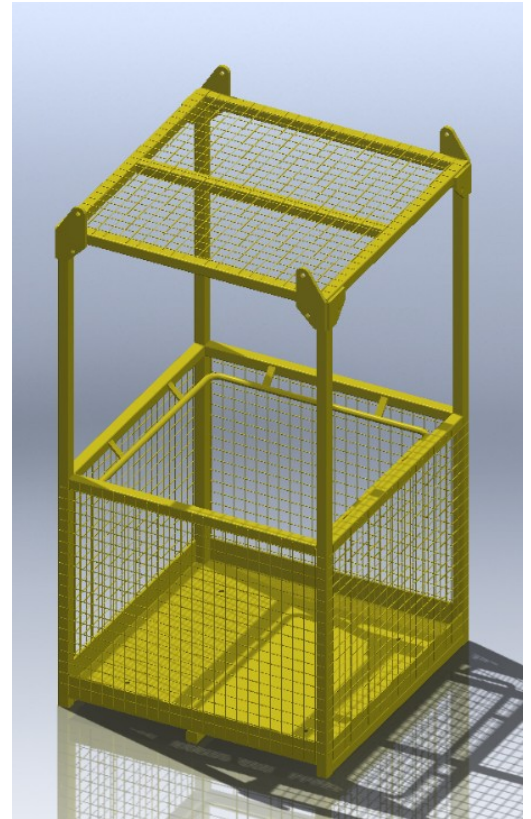

MESH ON SIDES AND ROOF